



LED
LIGHTING

 **LED**MODE

CATEGORIES

DOWNLIGHTS.....	1
SLIM PANEL LIGHTS.....	5
MAGNETIC LIGHTING.....	6
LED ALUMINUM PROFILES.....	27
POWER SUPPLIES.....	50
LED STRIPS.....	64
LED STRIP CONNECTORS.....	73





LBT-3.5" 360° FGB -12
3.5 INCH ROUND GIMBAL
LED DOWNLIGHT

DIMENSION OD X H (IN)

4.3 X 3.1

POWER WATT

12W

INPUT VOLTAGE

AC120V

BEAM ANGLE

36°

COLOR TEMPERATURE

5CCT

INGRESS PROTECTION

IP44

CUT OUT SIZE (IN)

3.5 - 3.9

LUMINOUS FLUX

85 LM/W

MATERIAL

ALUMINUM DIE CAST

CRI

>90

OPERATING MODE

TRIAC DIMMABLE

TRIM COLOR

WHITE

CERTIFICATES

cETLus ENERGY STAR

LED

COB



LBT-3.5" 360° FGB -12
3.5 INCH ROUND GIMBAL
LED DOWNLIGHT

DIMENSION OD X H (IN)

4.3 X 3.1

POWER WATT

12W

INPUT VOLTAGE

AC120V

BEAM ANGLE

36°

COLOR TEMPERATURE

5CCT

INGRESS PROTECTION

IP44

CUT OUT SIZE (IN)

3.5 - 3.9

LUMINOUS FLUX

85 LM/W

MATERIAL

ALUMINUM DIE CAST

CRI

>90

OPERATING MODE

TRIAC DIMMABLE

TRIM COLOR

BLACK

CERTIFICATES

cETLus ENERGY STAR

LED

COB



LBT-3.5" 360° FGB -12
3.5 INCH ROUND GIMBAL
LED DOWNLIGHT

DIMENSION L X W X H (IN)

4.3 X 4.3 X 3.1

POWER WATT

12W

INPUT VOLTAGE

AC120V

BEAM ANGLE

36°

COLOR TEMPERATURE

5CCT

INGRESS PROTECTION

IP44

CUT OUT SIZE (IN)

3.5 - 3.9

LUMINOUS FLUX

85 LM/W

MATERIAL

ALUMINUM DIE CAST

CRI

>90

OPERATING MODE

TRIAC DIMMABLE

TRIM COLOR

WHITE

CERTIFICATES

cETLus ENERGY STAR

LED

COB



LBT-3.5" 360° FGB -12
3.5 INCH ROUND GIMBAL
LED DOWNLIGHT

DIMENSION L X W X H (IN)

4.3 X 4.3 X 3.1

POWER WATT

12W

INPUT VOLTAGE

AC120V

BEAM ANGLE

36°

COLOR TEMPERATURE

5CCT

INGRESS PROTECTION

IP44

CUT OUT SIZE (IN)

3.5 - 3.9

LUMINOUS FLUX

85 LM/W

MATERIAL

ALUMINUM DIE CAST

CRI

>90

OPERATING MODE

TRIAC DIMMABLE

TRIM COLOR

BLACK

CERTIFICATES

cETLus ENERGY STAR

LED

COB



LBT-3.5" 360° FGB -12
3.5 INCH ROUND GIMBAL
LED DOWNLIGHT

DIMENSION L X W X H (IN)
7.8 X 4.3 X 3.1

POWER WATT
12W*2

INPUT VOLTAGE
AC120V

BEAM ANGLE
36°

COLOR TEMPERATURE
5CCT

INGRESS PROTECTION
IP44

CUT OUT SIZE (IN)
3.7 - 7.2

LUMINOUS FLUX
85 LM/W

MATERIAL
ALUMINUM DIE CAST

CRI
>90

OPERATING MODE
TRIAC DIMMABLE

TRIM COLOR
WHITE

CERTIFICATES
cETLus ENERGY STAR

LED
COB



LBT-3.5" 360° FGB -12
3.5 INCH ROUND GIMBAL
LED DOWNLIGHT

DIMENSION L X W X H (IN)
7.8 X 4.3 X 3.1

POWER WATT
12W*2

INPUT VOLTAGE
AC120V

BEAM ANGLE
36°

COLOR TEMPERATURE
5CCT

INGRESS PROTECTION
IP44

CUT OUT SIZE (IN)
3.7 - 7.2

LUMINOUS FLUX
85 LM/W

MATERIAL
ALUMINUM DIE CAST

CRI
>90

OPERATING MODE
TRIAC DIMMABLE

TRIM COLOR
BLACK

CERTIFICATES
cETLus ENERGY STAR

LED
COB



LBT-RFX-12

**4 Inch Round Anti-glare
LED downlight**

DIMENSION D X H (IN)

5.3 X 1.02

POWER WATT

12W

INPUT VOLTAGE

AC120V

BEAM ANGLE

110°

COLOR TEMPERATURE

5CCT

INGRESS PROTECTION

IP44

CUT OUT SIZE (IN)

3.9 - 4.9

LUMINOUS FLUX

85 LM/W

MATERIAL

ALUMINUM DIE CAST

CRI

>80

OPERATING MODE

TRIAC DIMMABLE

TRIM COLOR

WHITE

CERTIFICATES

cETLus ENERGY STAR

LED

SMD2835



LBT-SFX-12

**4 Inch Square Anti-glare
LED downlight**

DIMENSION L X W X H (IN)

5 X 5 X 1.02

POWER WATT

12W

INPUT VOLTAGE

AC120V

BEAM ANGLE

36°

COLOR TEMPERATURE

5CCT

INGRESS PROTECTION

IP44

CUT OUT SIZE (IN)

3.9 - 4.6

LUMINOUS FLUX

85 LM/W

MATERIAL

ALUMINUM DIE CAST

CRI

>80

OPERATING MODE

TRIAC DIMMABLE

TRIM COLOR

WHITE

CERTIFICATES

cETLus ENERGY STAR

LED

SMD2835



LBT-4SRPL-09C
4 Inch led panel light

DIMENSION OD X H (IN)

4.7 X 0.4

POWER WATT

9W

INPUT VOLTAGE

AC120V 50HZ/60HZ

BEAM ANGLE

110°

COLOR TEMPERATURE

5CCT

INGRESS PROTECTION

IP44

CUT OUT SIZE (IN)

4.1

LUMINOUS FLUX

85 LM/W

MATERIAL

ALUMINUM

CRI

>80

OPERATING MODE

TRIAC (5%-100%)

TRIM COLOR

WHITE

CERTIFICATES

cETLus ENERGY STAR

LED

SMD2835



LBT-PL-12
6 Inch led panel light

DIMENSION OD X H (IN)

6.6 X 0.4

POWER WATT

12W

INPUT VOLTAGE

AC120V 50HZ/60HZ

BEAM ANGLE

110°

COLOR TEMPERATURE

5CCT

INGRESS PROTECTION

IP44

CUT OUT SIZE (IN)

6.1

LUMINOUS FLUX

85 LM/W

MATERIAL

ALUMINUM

CRI

>80

OPERATING MODE

TRIAC (5%-100%)

TRIM COLOR


WHITE

CERTIFICATES

cETLus ENERGY STAR

LED

SMD2835

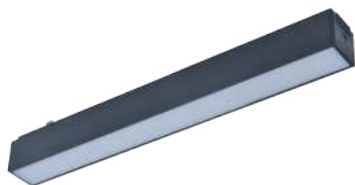

OLEO3-A12S-D
Magnetic Linear Light

DIMENSION L X W X H (IN)
10.12 X 1.02 X 1.18

WATT
12W

INPUT VOLTAGE
24V

BEAM ANGLE
120°

COLOR TEMPERATURE
2CCT 2700K-4000K

WARRANTY
5 YEARS

TYPE
DIFFUSER

LUMINOUS FLUX
680 LM

MATERIAL
ALUMINUM CASE, PC DIFFUSER

CRI
90

OPERATING MODE
DIMMABLE

TRIM COLOR
MATTE BLACK

CERTIFICATES
cETLus

LED
HONGLITRONICS



OLEO3-A18S-D
Magnetic Linear Light

DIMENSION L X W X H (IN)
15.04 X 1.02 X 1.18

WATT
18W

INPUT VOLTAGE
24V

BEAM ANGLE
120°

COLOR TEMPERATURE
2CCT 2700K-4000K

WARRANTY
5 YEARS

TYPE
DIFFUSER

LUMINOUS FLUX
970 LM

MATERIAL
ALUMINUM CASE, PC DIFFUSER

CRI
90

OPERATING MODE
DIMMABLE

TRIM COLOR
MATTE BLACK

CERTIFICATES
cETLus

LED
HONGLITRONICS



OLEO3-A24S-D
Magnetic Linear Light

DIMENSION L X W X H (IN)

20.04 X 1.02 X 1.18

WATT

24W

INPUT VOLTAGE

24V

BEAM ANGLE

120°

COLOR TEMPERATURE

2CCT 2700K-4000K

WARRANTY

5 YEARS

TYPE

DIFFUSER

LUMINOUS FLUX

1340 LM

MATERIAL

ALUMINUM CASE, PC DIFFUSER

CRI

90

OPERATING MODE

DIMMABLE

TRIM COLOR

MATTE BLACK

CERTIFICATES

cETLus

LED

HONGLITRONICS



OLEO3-A12A-D
Magnetic Linear Light

DIMENSION L X W X H (IN)

10.12 X 1.02 X 1.18

WATT

12W

INPUT VOLTAGE

24V

BEAM ANGLE

120°

COLOR TEMPERATURE

2CCT 2700K-4000K

WARRANTY

5 YEARS

TYPE

LENS

LUMINOUS FLUX

1840 LM

MATERIAL

ALUMINUM CASE, PC LENS

CRI

90

OPERATING MODE

DIMMABLE

TRIM COLOR

MATTE BLACK

CERTIFICATES

cETLus

LED

HONGLITRONICS

**OLEO3-A18A-D**

Magnetic Linear Light

DIMENSION L X W X H (IN)

15.4 X 1.02 X 1.18

WATT

18W

INPUT VOLTAGE

24V

BEAM ANGLE

120°

COLOR TEMPERATURE

2CCT 2700K-4000K

WARRANTY

5 YEARS

TYPE

LENS

LUMINOUS FLUX

1380 LM

MATERIAL

ALUMINUM CASE, PC LENS

CRI

90

OPERATING MODE

DIMMABLE

TRIM COLOR

MATTE BLACK

CERTIFICATES

cETLus

LED

HONGLITRONICS**OLEO3-A24A-D**

Magnetic Linear Light

DIMENSION L X W X H (IN)

20.04 X 1.02 X 1.18

WATT

24W

INPUT VOLTAGE

24V

BEAM ANGLE

36°

COLOR TEMPERATURE

2CCT 2700K-4000K

WARRANTY

5 YEARS

TYPE

LENS

LUMINOUS FLUX

930 LM

MATERIAL

ALUMINUM CASE, PC LENS

CRI

90

OPERATING MODE

DIMMABLE

TRIM COLOR

MATTE BLACK

CERTIFICATES

cETLus

LED

HONGLITRONICS

**OLEO3-D12A-D**

Magnetic Linear Light

DIMENSION L X W X H (IN)

9.25 X 1.34 X 2.09

WATT

12W

INPUT VOLTAGE

24V

BEAM ANGLE

36°

COLOR TEMPERATURE

2CCT 2700K-4000K

WARRANTY

5 YEARS

TYPE

LENS ADJUSTABLE

LUMINOUS FLUX

850 LM

MATERIAL

ALUMINUM CASE, PC LENS

CRI

90

OPERATING MODE

DIMMABLE

TRIM COLOR

MATTE BLACK

CERTIFICATES

cETLus

LED

HONGLITRONICS**OLEO3-D18A-D**

Magnetic Linear Light

DIMENSION L X W X H (IN)

13.50 X 1.34 X 2.32

WATT

18W

INPUT VOLTAGE

24V

BEAM ANGLE

36°

COLOR TEMPERATURE

2CCT 2700K-4000K

WARRANTY

5 YEARS

TYPE

LENS ADJUSTABLE

LUMINOUS FLUX

1150 LM

MATERIAL

ALUMINUM CASE, PC LENS

CRI

90

OPERATING MODE

DIMMABLE

TRIM COLOR

MATTE BLACK

CERTIFICATES

cETLus

LED

HONGLITRONICS



OLEO3-C10C-D
Magnetic Pendant Light

DIMENSION D (IN)

D1.77 X 3.94

WATT

9W

INPUT VOLTAGE

24V

BEAM ANGLE

36°

COLOR TEMPERATURE

2CCT 2700K-4000K

WARRANTY

5 YEARS

TYPE

COB TRACK LIGHT, LENS

LUMINOUS FLUX

900 LM

MATERIAL

ALUMINUM CASE, PC LENS

CRI

90

OPERATING MODE

DIMMABLE

TRIM COLOR

MATTE BLACK

CERTIFICATES

cETLus

LED

HONGLITRONICS



OLEO3-C12C-D
Magnetic Pendant Light

DIMENSION D (IN)

D2.17 X 4.72

WATT

12W

INPUT VOLTAGE

24V

BEAM ANGLE

36°

COLOR TEMPERATURE

2CCT 2700K-4000K

WARRANTY

5 YEARS

TYPE

COB TRACK LIGHT, LENS

LUMINOUS FLUX

1080 LM

MATERIAL

ALUMINUM CASE, PC LENS

CRI

90

OPERATING MODE

DIMMABLE

TRIM COLOR

MATTE BLACK

CERTIFICATES

cETLus

LED

HONGLITRONICS

**OLEO3-C26C**

Magnetic Pendant Light

DIMENSION D (IN)

D2.55 X 5,90

WATT

18W

INPUT VOLTAGE

24V

BEAM ANGLE

36°

COLOR TEMPERATURE

2700K

WARRANTY

5 YEARS

TYPE

COB TRACK LIGHT, LENS

LUMINOUS FLUX

2160 LM

MATERIAL

ALUMINUM CASE, PC LENS

CRI

90

OPERATING MODE

DIMMABLE

TRIM COLOR

MATTE BLACK

CERTIFICATES

cETLus

LED

HONGLITRONICS**OLEO3-C26C**

Magnetic Pendant Light

DIMENSION D (IN)

D2.55 X 5,90

WATT

18W

INPUT VOLTAGE

24V

BEAM ANGLE

36°

COLOR TEMPERATURE

4000K

WARRANTY

5 YEARS

TYPE

COB TRACK LIGHT, LENS

LUMINOUS FLUX

2160 LM

MATERIAL

ALUMINUM CASE, PC LENS

CRI

90

OPERATING MODE

DIMMABLE

TRIM COLOR

MATTE BLACK

CERTIFICATES

cETLus

LED

HONGLITRONICS



OLEO3-G12C-D
Magnetic COB Spot Light

DIMENSION D (IN)	WATT
D1.77 X 10.23	9W
INPUT VOLTAGE	BEAM ANGLE
24V	36°
COLOR TEMPERATURE	WARRANTY
2CCT 2700K-4000K	5 YEARS
TYPE	LUMINOUS FLUX
COB TRACK LIGHT, LENS	1000 LM
MATERIAL	CRI
ALUMINUM CASE, PC LENS	90
OPERATING MODE	TRIM COLOR
DIMMABLE	MATTE BLACK
CERTIFICATES	LED
cETLus	HONGLITRONICS



OLEO3-E08B-D
Magnetic Spot Light For
Magnetic Surface Track
Rail Usage Only

DIMENSION D (IN)	WATT
D2.16 X 2.51	8W
INPUT VOLTAGE	BEAM ANGLE
24V	36°
COLOR TEMPERATURE	WARRANTY
2CCT 2700K-4000K	5 YEARS
TYPE	LUMINOUS FLUX
DOWN LIGHT	568 LM
MATERIAL	CRI
ALUMINUM CASE, PC LENS	90
OPERATING MODE	TRIM COLOR
DIMMABLE	MATTE BLACK
CERTIFICATES	LED
cETLus	HONGLITRONICS



OLEO3-M01M-1000 Magnetic Surface Track Rail

TRACK DIMENSION L X H X W (IN)
3.28 X 1.06 X 0.34

TRIM COLOR
MATTE BLACK

MATERIAL
ALUMINUM TRACK, COPPER WIRE

CERTIFICATES
cETL_{us}

WARRANTY
5 YEARS



OLEO3-M01M-2000 Magnetic Surface Track Rail

TRACK DIMENSION L X H X W (IN)
6.56 X 1.06 X 0.34

TRIM COLOR
MATTE BLACK

MATERIAL
ALUMINUM TRACK, COPPER WIRE

CERTIFICATES
cETL_{us}

WARRANTY
5 YEARS



**OLEO3-M01M-3000**

Magnetic Surface Track Rail

TRACK DIMENSION L X H X W (IN)

9.84 X 1.06 X 0.34

TRIM COLOR

MATTE BLACK

MATERIAL

ALUMINUM TRACK, COPPER WIRE

CERTIFICATES

cETL_{us}

WARRANTY

5 YEARS**OLEO3-M08**

Aluminum Decorative Sheet For Track

TRACK DIMENSION H X W (IN)

18.31 X 0.79

TRIM COLOR

MATTE BLACK

MATERIAL

ALUMINUM TRACK, COPPER WIRE

CERTIFICATES

cETL_{us}

WARRANTY

5 YEARS



OLEO3-M01

Magnetic SurfaceTrack Rail End-Cap

TRIM COLOR

MATTE BLACK

MATERIAL

PC

WARRANTY

5 YEARS



OLEO3-M03

Magnetic Surface Track Rail I Connector

TRIM COLOR

MATTE BLACK

MATERIAL

PC

WARRANTY

5 YEARS



OLEO3-M04

Magnetic Surface Track Rail L Connector

TRIM COLOR

MATTE BLACK

MATERIAL

PC

WARRANTY

5 YEARS



OLEO3-M05

Magnetic Surface Track Rail Vertical Angle Connector

TRIM COLOR

MATTE BLACK

MATERIAL

PC

WARRANTY

5 YEARS



OLEO3-M06

Magnetic Surface Track Rail T Connector

TRIM COLOR

MATTE BLACK

MATERIAL

PC

WARRANTY

5 YEARS



OLEO3-M07

Magnetic Surface Track Rail X Connector

TRIM COLOR


MATTE BLACK

MATERIAL

PC

WARRANTY

5 YEARS

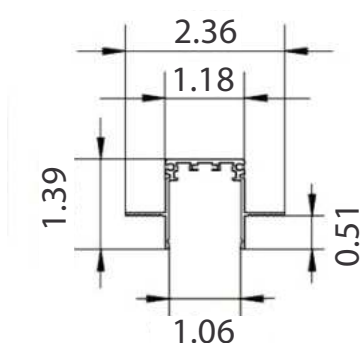**OLEO3-M04M-1000**

Magnetic Recessed Track Rail

X

TRACK DIMENSION L X H W (IN)

3.28 X 1.18 X 1.39

DRYWALL THICKNESS

0.512

TRIM COLOR

MATTE BLACK


MATERIAL

ALUMINUM TRACK, COPPER WIRE

CERTIFICATES

cETL_{us}

WARRANTY

5 YEARS**OLEO3-M04M-2000**

Magnetic Recessed Track Rail

TRACK DIMENSION L X H W (IN)

6.56 X 1.18 X 1.39

DRYWALL THICKNESS

0.512

TRIM COLOR

MATTE BLACK

MATERIAL


ALUMINUM TRACK, COPPER WIRE

CERTIFICATES

cETL_{us}

WARRANTY

5 YEARS

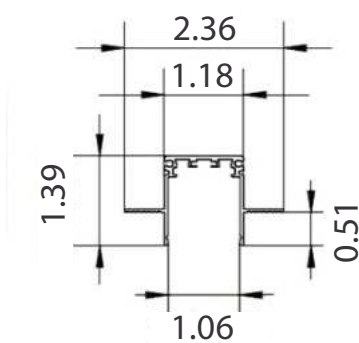**OLEO3-M04M-3000****Magnetic Recessed Track Rail**

L X H X W (IN)

TRACK DIMENSION

9.84 X 1.18 X 1.39

DRYWALL THICKNESS

0.512

TRIM COLOR

MATTE BLACK

MATERIAL

ALUMINUM TRACK, COPPER WIRE

CERTIFICATES

cETL_{us}

WARRANTY

5 YEARS**OLEO3-M09****Electric Connector for Magnetic Track Rail**

TRIM COLOR

MATTE BLACK

MATERIAL

ALUMINUM TRACK, COPPER WIRE

CERTIFICATES

RAIL TO PS

WARRANTY

5 YEARS



OLEO3-M10

Electric Connector for Magnetic Track Rail

TYPE

DIRECT CONNECTOR

TRIM COLOR


MATTE BLACK

MATERIAL

PC

WARRANTY

5 YEARS

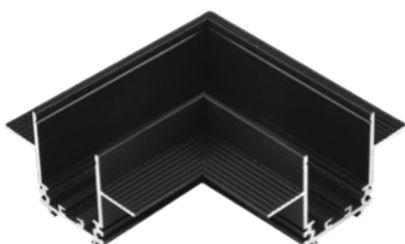

CX23TC01

Magnetic Recessed Track Rail L Connector

TRIM COLOR


MATTE BLACK

MATERIAL

ALUMINUM TRACK, COPPER WIRE

WARRANTY

5 YEARS

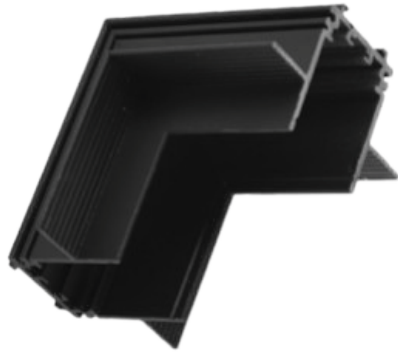

CX23TC02

Magnetic Recessed Track Rail L Connector

TRIM COLOR

MATTE BLACK

MATERIAL

ALUMINUM TRACK, COPPER WIRE

WARRANTY

5 YEARS



CX23TC03

Magnetic Recessed Track Rail L Connector

TRIM COLOR


MATTE BLACK

MATERIAL

ALUMINUM TRACK, COPPER WIRE

WARRANTY

5 YEARS

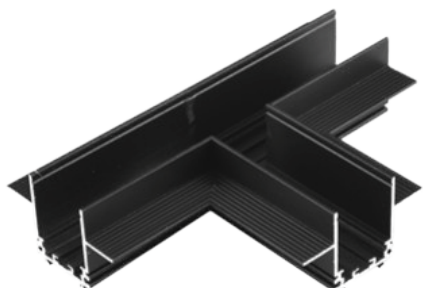

CX23TC04

Magnetic Recessed Track Rail T Connector

TRIM COLOR


MATTE BLACK

MATERIAL

ALUMINUM TRACK, COPPER WIRE

WARRANTY

5 YEARS

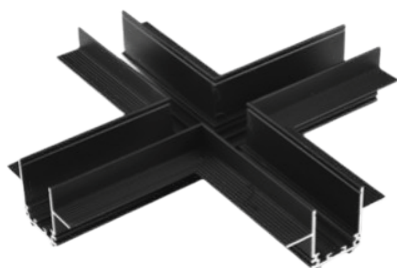

CX23TC05

Magnetic Recessed Track Rail X Connector

TRIM COLOR

MATTE BLACK

MATERIAL

ALUMINUM TRACK, COPPER WIRE

WARRANTY

5 YEARS

**OLEO3-M11**

Electric Connector for Magnetic Track Rail

TYPE

90 DEGREE CONNECTOR

TRIM COLOR

MATTE BLACK

MATERIAL

ALUMINUM TRACK, COPPER WIRE

WARRANTY

5 YEARS**OLEO3-M03M-1000**

Hanging Magnetic Track Rail

TRACK DIMENSION L X H X W (IN)

3.28 X 1.06 X 0.68

TRIM COLOR

MATTE BLACK


MATERIAL

ALUMINUM TRACK, COPPER WIRE

CERTIFICATES

cETLus

WARRANTY

5 YEARS

**OLEO3-M03M-2000**

Hanging Magnetic Track Rail

TRACK DIMENSION L X H X W (IN)

6.56 X 1,06 X 0.68

TRIM COLOR

MATTE BLACK


MATERIAL

ALUMINUM TRACK, COPPER WIRE

CERTIFICATES

cETL_{us}

WARRANTY

5 YEARS**OLEO3-M03M-3000**

Hanging Magnetic Track Rail

TRACK DIMENSION L X H X W (IN)

9.84 X 1,06 X 0.68

TRIM COLOR

MATTE BLACK


MATERIAL

ALUMINUM TRACK, COPPER WIRE

CERTIFICATES

cETL_{us}

WARRANTY

5 YEARS



OLEO3-M03M
Wire For Magnetic Hanging Track Rail

DIMENSION (IN)	WATT
59	9W
WIRE SIZE (IN)	WIRE QTY (FT)
4.92	2 X 4.92
CEILING CONNECTOR QTY	WARRANTY
2 PCS	5 YEARS
ALUMINUM CHANNEL CONNECTOR QTY	DOWEL & SCREW
2 PCS	2 PCS
MATERIAL	TRIM COLOR
STEEL	MATTE BLACK



CX23TC06
Magnetic Recessed Track Rail Clamp

TYPE	TRIM COLOR
2 PCS CLAMPS- 8 SCREWS PER SET	MATTE BLACK
MATERIAL	WARRANTY
IRON	5 YEARS

OLEO3-M12

Recessed Ceiling Cover For PS Cable



TRIM COLOR

MATTE BLACK

MATERIAL

ALUMINUM

CERTIFICATES

cETL_{us}

**XT1168**

Aluminum LED Channel

PROFILE COLOR

BLACK

COVER OPTION

PC MILKY DIFFUSER


DIMENSION W X H (IN)

1.50 X 1.55

LENGTH (FT)

10

MATERIAL

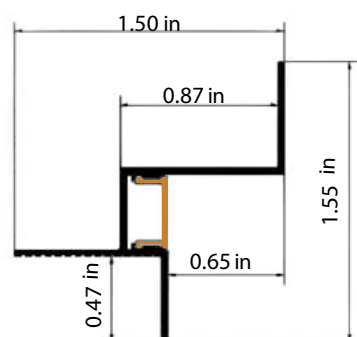ANODIZED ALUMINUM**XT230**

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER


DIMENSION W X H (IN)

2.36

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM



XT695

Aluminum LED Channel

PROFILE COLOR

WHITE

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)

3.85 X 1.04

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM



XT585

Aluminum LED Channel

PROFILE COLOR

WHITE

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)


3.86 X 0.75

LENGTH (FT)

10

MATERIAL

ANODIZED ALUMINUM



**BG97**

Aluminum LED Channel

PROFILE COLOR

BLACK

COVER OPTION

PC MILKY DIFFUSER


DIMENSION W X H (IN)

1.97 X 1.97

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM**BG18**

Aluminum LED Channel

PROFILE COLOR

BLACK

COVER OPTION

PC MILKY DIFFUSER


DIMENSION W X H (IN)


1.97 X 2.95

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM

**BG17****Aluminum LED Channel**

PROFILE COLOR

BLACK

COVER OPTION

PC MILKY DIFFUSER


DIMENSION W X H (IN)

1.58 X 2.95

LENGTH (FT)

8

MATERIAL

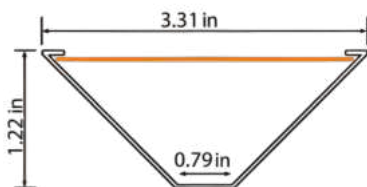ANODIZED ALUMINUM**XT641****Aluminum LED Channel**

PROFILE COLOR

BLACK

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)


3.31 X 1.22

LENGTH (FT)

10

MATERIAL

ANODIZED ALUMINUM



XT59

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)


0.75 X 0.75

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM



XT58

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)


0.62 X 0.62

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM

**XT199**

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER


DIMENSION W X H (IN)

1.63 X 0.98

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM**XT66**

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)

1.10 X 0.98

LENGTH (FT)


8

MATERIAL

ANODIZED ALUMINUM




XT437
Aluminum LED Channel

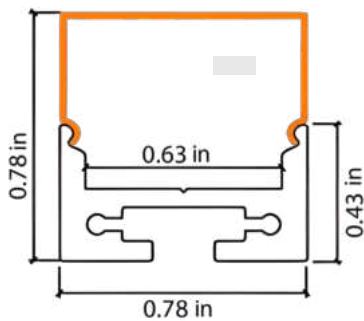


PROFILE COLOR	SILVER
COVER OPTION	PC MILKY DIFFUSER
DIMENSION W X H (IN)	0.78 X 0.78
LENGTH (FT)	8
MATERIAL	ANODIZED ALUMINUM



XT303S
Aluminum LED Channel



PROFILE COLOR	SILVER
COVER OPTION	PC MILKY DIFFUSER
DIMENSION W X H (IN)	1.77 X 1.64
LENGTH (FT)	8
MATERIAL	ANODIZED ALUMINUM

**XT303R**

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER


DIMENSION W X H (IN)

1.77 X 1.65

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM**XT397**

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)


0.69 X 0.48

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM

**XT255**

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION


PC MILKY DIFFUSER

DIMENSION W X H (IN)

0.96 X 0.48**8**

LENGTH (FT)

MATERIAL

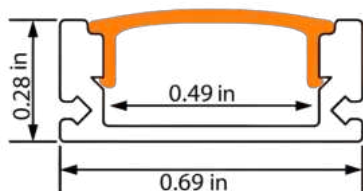ANODIZED ALUMINUM**XT164**

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)

0.69 X 0.28**8**

LENGTH (FT)

MATERIAL

ANODIZED ALUMINUM

**XT163**

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER


DIMENSION W X H (IN)

0.97 X 0.28

LENGTH (FT)

8

MATERIAL

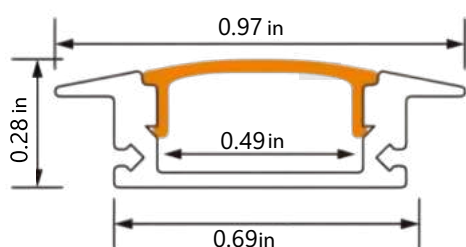ANODIZED ALUMINUM**XT451**

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER


DIMENSION W X H (IN)


0.39 X 0.51

LENGTH (FT)

8


MATERIAL

ANODIZED ALUMINUM



XT452
Aluminum LED Channel

PROFILE COLOR	SILVER
COVER OPTION	PC MILKY DIFFUSER
DIMENSION W X H (IN)	0.55 X 0.51
LENGTH (FT)	8
MATERIAL	ANODIZED ALUMINUM



XT231
Aluminum LED Channel

PROFILE COLOR	SILVER
COVER OPTION	PC MILKY DIFFUSER
DIMENSION W X H (IN)	0.31 X 0.35
LENGTH (FT)	8
MATERIAL	ANODIZED ALUMINUM



XT293
Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)


0.50 X 0.35

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM

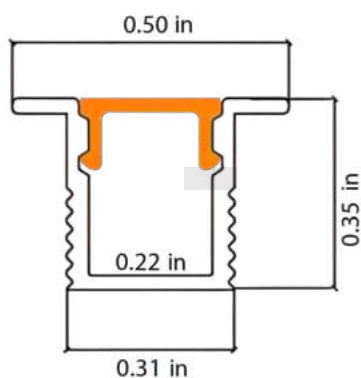

XT268
Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)


0.47 X 0.30

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM

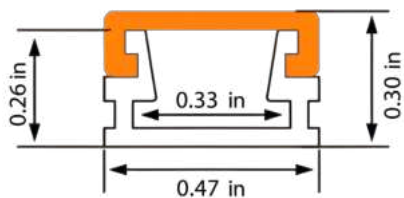



XT298B
Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)


0.58 X 0.35

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM

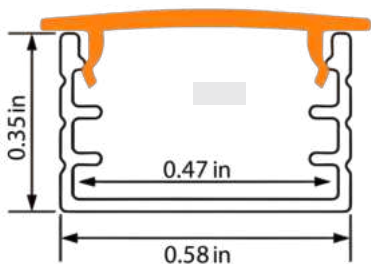

XT231B
Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)


0.31 X 0.35

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM

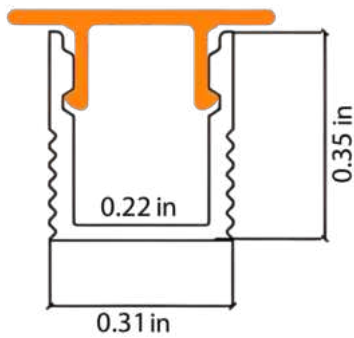



XT709
Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)


1.58 X 0.51

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM

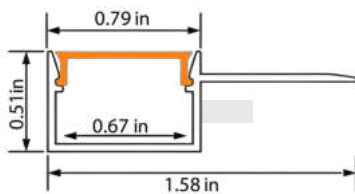

XT708
Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)


1.58 X 0.51



LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM

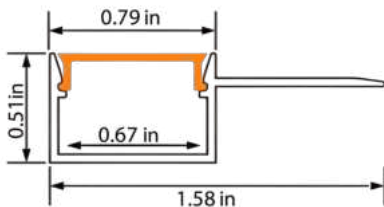

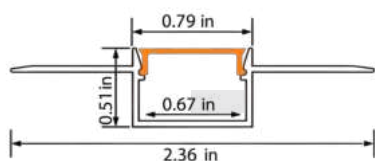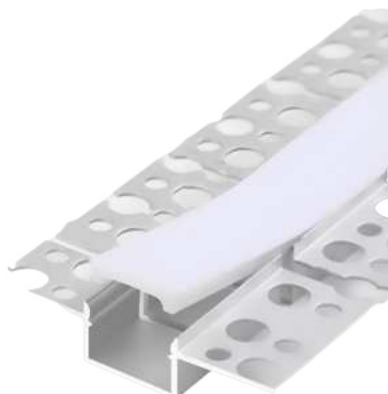

XT711Curved
Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

SILICON COVER

DIMENSION W X H (IN)


2.36 X 0.51

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM

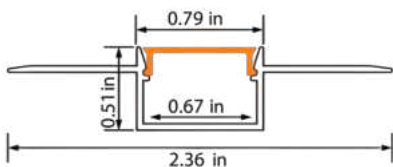

XT711
Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)

2.36 X 0.51

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM

**XT710**

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER



DIMENSION W X H (IN)

2.36 X 0.51

LENGTH (FT)

8

MATERIAL

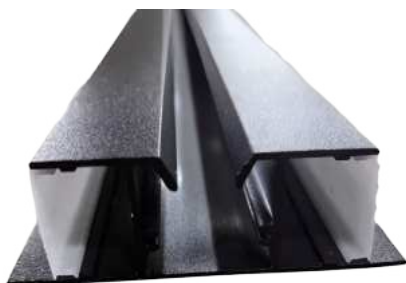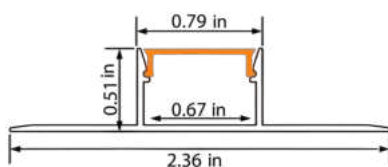ANODIZED ALUMINUM**XT572**

Aluminum LED Channel

PROFILE COLOR

BLACK

COVER OPTION

PC MILKY DIFFUSER


DIMENSION W X H (IN)


2.97 X 0.96

LENGTH (FT)

8

MATERIAL

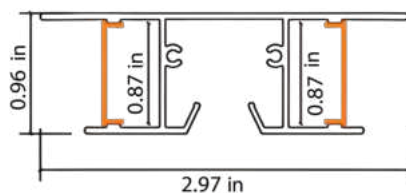ANODIZED ALUMINUM

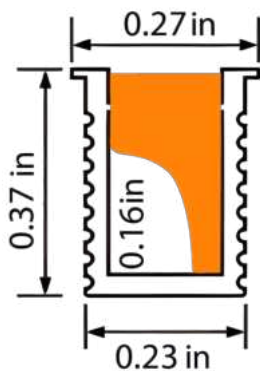**JP03**

Aluminum LED Channel

PROFILE COLOR

BLACK

COVER OPTION

PC MILKY DIFFUSER



DIMENSION W X H (IN)

0.27 X 0.37

LENGTH (FT)

8

MATERIAL

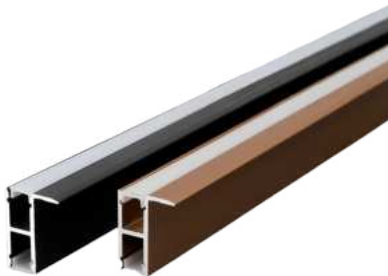ANODIZED ALUMINUM**JP26**

Aluminum LED Channel

PROFILE COLOR

BLACK

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)

0.59 X 0.79

LENGTH (FT)


8

MATERIAL

ANODIZED ALUMINUM



XT329
Aluminum LED Channel

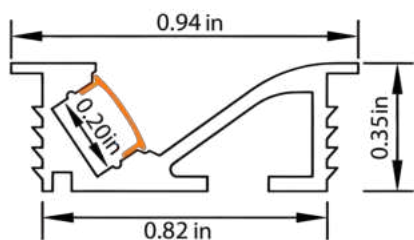

PROFILE COLOR

BLACK

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)

0.94 X 0.35

LENGTH (FT)


8

MATERIAL

ANODIZED ALUMINUM



JP25
Aluminum LED Channel

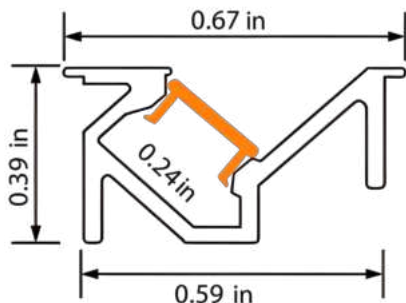

PROFILE COLOR

BLACK

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)


0.67 X 0.39

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM

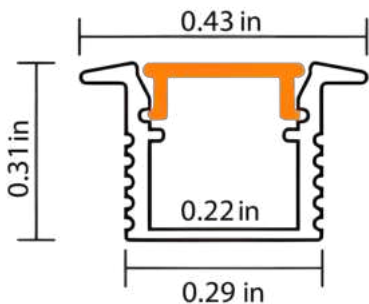

JP30
Aluminum LED Channel



PROFILE COLOR
GOLD

COVER OPTION
PC MILKY DIFFUSER

DIMENSION W X H (IN)
0.43 X 0.31

LENGTH (FT)
8

MATERIAL
ANODIZED ALUMINUM

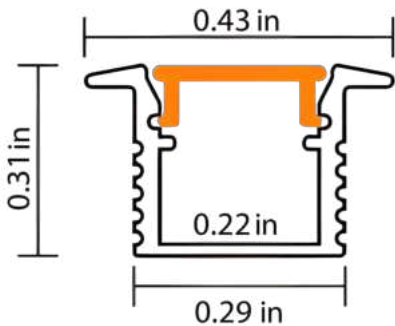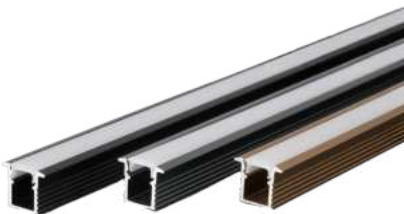

JP30
Aluminum LED Channel


PROFILE COLOR
BLACK

COVER OPTION
PC MILKY DIFFUSER

DIMENSION W X H (IN)
0.43 X 0.31

LENGTH (FT)
8

MATERIAL
ANODIZED ALUMINUM

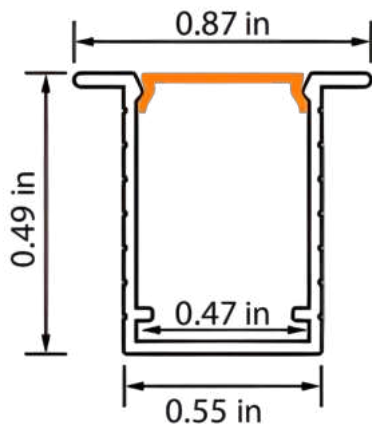**XT581**

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER


DIMENSION W X H (IN)

0.87 X 0.49

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM**XT580**

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER

DIMENSION W X H (IN)

0.55 X 0.79

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM

**JP12**

Aluminum LED Channel

PROFILE COLOR

BLACK

COVER OPTION

PC MILKY DIFFUSER


DIMENSION W X H (IN)

1.25 X 0.46

LENGTH (FT)

8

MATERIAL

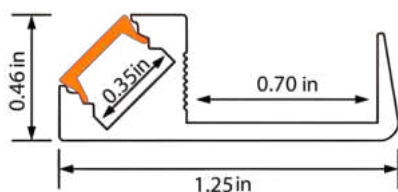ANODIZED ALUMINUM**JP22**

Aluminum LED Channel

PROFILE COLOR

SILVER

COVER OPTION

PC MILKY DIFFUSER


DIMENSION W X H (IN)

0.52 X 0.47

LENGTH (FT)

8

MATERIAL

ANODIZED ALUMINUM



Aluminum LED Profile Mechanical Connector

L CONNECTOR

90° JOINT CONNECTOR



Aluminum LED Profile Mechanical Connector

DIRECT CONNECTOR

180° JOINT CONNECTOR

Hanging Wire For Aluminum Profiles



WIRE SIZE (FT)

4.92

WIRE QTY (FT)

2 X 4.92

CEILING CONNECTOR QTY

2 PCS

ALUMINUM CHANNEL CONNECTOR QTY

2 PCS

DOWEL & SCREW

2 PCS



OLEO3-M100-A
Dimming Type Linkuan
Power Supply

DIMENSION L X H X W (IN)	POWER WATT
6.49 X 3.77 X 1.57	100W
INPUT VOLTAGE	OUTPUT VOLTAGE
120-277V	24V
TRIM COLOR	CERTIFICATES
MATTE BLACK	cULus
MATERIAL	LED
IRON JUNCTION BOX, PC POWER SUPPLY	5 YEARS
TYPE	
TRIAC/0-10V/1-10V/POTENTIOMETER/10V PWM 5 IN 1 DIMMABLE LED DRIVER	



OLEO3-C12C-D
Dimming Type Linkuan
Power Supply

DIMENSION L X H X W (IN)	POWER WATT
8.26 X 3.77 X 1.57	200W
INPUT VOLTAGE	OUTPUT VOLTAGE
120-277V	24V
TRIM COLOR	CERTIFICATES
MATTE BLACK	cULus
MATERIAL	LED
IRON JUNCTION BOX, PC POWER SUPPLY	5 YEARS
TYPE	
TRIAC/0-10V/1-10V/POTENTIOMETER/10V PWM 5 IN 1 DIMMABLE LED DRIVER	



Mean Well APV-8-24
Power supply

DIMENSION L X H X W (IN)	POWER WATT
2.36 X 1.18 X 0.93	8W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP42	2
MATERIAL	DIM
PC	ON/OFF
CERTIFICATES	
cULus	



Mean Well APV-12-24
Power supply

DIMENSION L X H X W (IN)	POWER WATT
3.03 X 1.57 X 1.14	12W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP42	2
MATERIAL	DIM
PC	ON/OFF
CERTIFICATES	
cULus	



Mean Well APV-16-24
Power supply

DIMENSION L X H X W (IN)	POWER WATT
3.03 X 1.57 X 1.14	16W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP42	2
MATERIAL	DIM
PC	ON/OFF
CERTIFICATES	
cULus	



Mean Well APV-25-24
Power supply

DIMENSION L X H X W (IN)	POWER WATT
3.31 X 2.24 X 1.16	25W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP42	2
MATERIAL	DIM
PC	ON/OFF
CERTIFICATES	
cULus	



Mean Well APV-35-24
Power supply

DIMENSION L X H X W (IN)	POWER WATT
3.31 X 2.24 X 1.16	35W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP42	2
MATERIAL	DIM
PC	ON/OFF
CERTIFICATES	
cULus	



Mean Well LPV-60-24
Power supply

DIMENSION L X H X W (IN)	POWER WATT
6.40 X 1.67 X 1.26	60W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP42	2
MATERIAL	DIM
PC	ON/OFF
CERTIFICATES	
cULus	



Mean Well LPV-100-24
Power supply

DIMENSION L X H X W (IN)	POWER WATT
7.48 X 2.05 X 1.46	100W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP67	2
MATERIAL	DIM
PC	ON/OFF
CERTIFICATES	
cULus	



Mean Well LPV-150-24
Power supply

DIMENSION L X H X W (IN)	POWER WATT
7.52 X 2.48 X 1.48	150W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP67	2
MATERIAL	DIM
PC	ON/OFF
CERTIFICATES	
cULus	



Mean Well LRS-35-24
Power supply

DIMENSION L X H X W (IN)	POWER WATT
3.90 X 3.23 X 1.18	35W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP20	3
MATERIAL	DIM
METAL CASE	ON/OFF
CERTIFICATES	
cULus	



Mean Well LRS-50-24
Power supply

DIMENSION L X H X W (IN)	POWER WATT
3.90 X 3.23 X 1.18	50W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP20	3
MATERIAL	DIM
METAL CASE	ON/OFF
CERTIFICATES	
cULus	



Mean Well LRS-75-24
Power supply

DIMENSION L X H X W (IN)	POWER WATT
3.90 X 3.82 X 1.18	75W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP20	3
MATERIAL	DIM
METAL CASE	ON/OFF
CERTIFICATES	
cULus	



Mean Well LRS-100-24
Power supply

DIMENSION L X H X W (IN)	POWER WATT
5.08 X 3.82 X 1.18	100W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP20	3
MATERIAL	DIM
METAL CASE	ON/OFF
CERTIFICATES	
cULus	



Mean Well LRS-150-24
Power supply

DIMENSION L X H X W (IN)
6.26 X 3.82 X 1.18

POWER WATT
150W

INPUT VOLTAGE
100-240V

OUTPUT VOLTAGE
24V

INGRESS PROTECTION
IP20

WARRANTY YEARS
3

MATERIAL
METAL CASE

DIM
ON/OFF

CERTIFICATES
cULus



Mean Well LRS-200-24
Power supply

DIMENSION L X H X W (IN)
8.46 X 4.53 X 1.18

POWER WATT
200W

INPUT VOLTAGE
100-240V

OUTPUT VOLTAGE
24V

INGRESS PROTECTION
IP20

WARRANTY YEARS
3

MATERIAL
METAL CASE

DIM
ON/OFF

CERTIFICATES
cULus



Mean Well LRS-350-24
Power supply

DIMENSION L X H X W (IN)
8.46 X 4.53 X 1.18

POWER WATT
350W

INPUT VOLTAGE
100-240V

OUTPUT VOLTAGE
24V

INGRESS PROTECTION
IP20

WARRANTY YEARS
3

MATERIAL
METAL CASE

DIM
ON/OFF

CERTIFICATES
cULus



Mean Well LRS-450-24
Power supply

DIMENSION L X H X W (IN)
8.86 X 4.88 X 1.38

POWER WATT
450W

INPUT VOLTAGE
100-240V

OUTPUT VOLTAGE
24V

INGRESS PROTECTION
IP20

WARRANTY YEARS
3

MATERIAL
METAL CASE

DIM
ON/OFF

CERTIFICATES
cULus

**Mean Well LRS-600-24**

Power supply

DIMENSION L X H X W (IN)

8.86 X 4.88 X 1.61

POWER WATT

600W

INPUT VOLTAGE

100-240V

OUTPUT VOLTAGE

24V

INGRESS PROTECTION

IP20

WARRANTY YEARS

3

MATERIAL

METAL CASE

DIM

ON/OFF

CERTIFICATES

cULus**Mean Well SLD-50-24**

Power supply

DIMENSION L X H X W (IN)

11.02 X 1.18 X 1.18

POWER WATT

50W

INPUT VOLTAGE

100-240V

OUTPUT VOLTAGE

24V

INGRESS PROTECTION

IP20

WARRANTY YEARS

3

MATERIAL

PC

DIM

ON/OFF

CERTIFICATES

cULus



Mean Well SLD-80-24
Power supply

DIMENSION L X H X W (IN)	POWER WATT
12.60 X 1.18 X 0.66	80W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP20	3
MATERIAL	DIM
PC	ON/OFF
CERTIFICATES	
cULus	



Mean Well SLD-150-24
Power supply

DIMENSION L X H X W (IN)	POWER WATT
12.99 X 1.38 X 0.87	150W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP20	3
MATERIAL	DIM
PC	ON/OFF
CERTIFICATES	
cULus	



Mean Well HLG-100H-24AB
Power supply

DIMENSION L X H X W (IN)	POWER WATT
8.66 X 2.68 X 1.53	100W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP67	7
MATERIAL	DIM
METAL CASE	DIMMABLE
CERTIFICATES	
cULus	



Mean Well HLG-150H-24AB
Power supply

DIMENSION L X H X W (IN)	POWER WATT
8.98 X 2.68 X 1.53	100W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP67	7
MATERIAL	DIM
METAL CASE	DIMMABLE
CERTIFICATES	
cULus	



WF-LD40U-24V

Power supply

DIMENSION L X H X W (IN)	POWER WATT
6.30 X 2.44 X 0.77	40W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP20	3
MATERIAL	DIM
PC	ON/OFF
CERTIFICATES	
cULus FCC ROHS	



WF-LD60U-24V

Power supply

DIMENSION L X H X W (IN)	POWER WATT
6.30 X 2.44 X 0.77	60W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP67	3
MATERIAL	DIM
PC	ON/OFF
CERTIFICATES	
cULus FCC ROHS	



WF-LD40U-24V

Power supply

DIMENSION L X H X W (IN)	POWER WATT
6.30 X 2.44 X 0.77	100W
INPUT VOLTAGE	OUTPUT VOLTAGE
100-240V	24V
INGRESS PROTECTION	WARRANTY YEARS
IP20	3
MATERIAL	DIM
PC	ON/OFF
CERTIFICATES	
cULus FCC ROHS	



MAX LOAD
12V 60W / 24V 100W
VOLTAGE
DC12V / 24V

Division Control For Single Door



MAX LOAD

12V 60W / 24V 100W

VOLTAGE

DC12V / 24V

Division Control For Single Door



COB STRIP

COLOR TEMPERATURE

2700K

POWER W/F

3.05

LEDs /FEET

156

CUTTING UNIT (IN)

1.97

VOLTAGE

24V

INGRESS PROTECTION

IP20

FPC WIDTH (IN)

0.31

LUMINOUS FLUX

305 LM/FT

ROLL SIZE (FEET)

16.4

CERTIFICATES

cULus



COB STRIP

COLOR TEMPERATURE

3000K

POWER W/F

3.05

LEDs /FEET

156

CUTTING UNIT (IN)

1.97

VOLTAGE

24V

INGRESS PROTECTION

IP20

FPC WIDTH (IN)

0.31

LUMINOUS FLUX

305 LM/FT

ROLL SIZE (FEET)

16.4

CERTIFICATES

cULus

**COB STRIP**

COLOR TEMPERATURE

4000K

POWER W/F

3.05

LEDs /FEET

156

CUTTING UNIT (IN)

1.97

VOLTAGE

24V

INGRESS PROTECTION

IP20

FPC WIDTH (IN)

0.31

LUMINOUS FLUX

305 LM/FT

ROLL SIZE (FEET)

16.4

CERTIFICATES

cULus**COB STRIP**

COLOR TEMPERATURE

5000K

POWER W/F

3.05

LEDs /FEET

156

CUTTING UNIT (IN)

1.97

VOLTAGE

24V

INGRESS PROTECTION

IP20

FPC WIDTH (IN)

0.31

LUMINOUS FLUX

305 LM/FT

ROLL SIZE (FEET)

16.4

CERTIFICATES

cULus



SMD 2835 STRIP

COLOR TEMPERATURE	POWER W/F
2700K	2.44
LEDs /FEET	CUTTING UNIT (IN)
37	1.97
VOLTAGE	INGRESS PROTECTION
24V	IP20
FPC WIDTH (IN)	LUMINOUS FLUX
0.19	214 LM/FT
ROLL SIZE (FEET)	PIXEL PITCH (IN)
16.4	0.33
CERTIFICATES	
cULus	



SMD 2835 STRIP

COLOR TEMPERATURE	POWER W/F
3000K	2.44
LEDs /FEET	CUTTING UNIT (IN)
37	1.97
VOLTAGE	INGRESS PROTECTION
24V	IP20
FPC WIDTH (IN)	LUMINOUS FLUX
0.19	214 LM/FT
ROLL SIZE (FEET)	PIXEL PITCH (IN)
16.4	0.33
CERTIFICATES	
cULus	




SMD 2835 STRIP

COLOR TEMPERATURE	POWER W/F
4000K	2.44
LEDs /FEET	CUTTING UNIT (IN)
37	1.97
VOLTAGE	INGRESS PROTECTION
24V	IP20
FPC WIDTH (IN)	LUMINOUS FLUX
0.19	214 LM/FT
ROLL SIZE (FEET)	PIXEL PITCH (IN)
16.4	0.33
CERTIFICATES	
cULus	




SMD 2835 STRIP

COLOR TEMPERATURE	POWER W/F
5000K	2.44
LEDs /FEET	CUTTING UNIT (IN)
37	1.97
VOLTAGE	INGRESS PROTECTION
24V	IP20
FPC WIDTH (IN)	LUMINOUS FLUX
0.19	214 LM/FT
ROLL SIZE (FEET)	PIXEL PITCH (IN)
16.4	0.33
CERTIFICATES	
cULus	

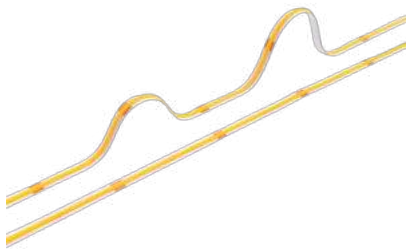


COB STRIP

COLOR TEMPERATURE	POWER W/F
2700K	2.13
LEDs /FEET	CUTTING UNIT (IN)
146	1.97
VOLTAGE	INGRESS PROTECTION
24V	IP20
FPC WIDTH (IN)	LUMINOUS FLUX
0.2	152 LM/FT
ROLL SIZE (FEET)	CERTIFICATES
16.4	cULus

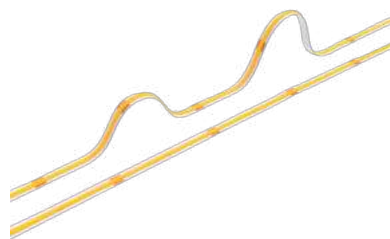


COB STRIP

COLOR TEMPERATURE	POWER W/F
3000K	2.13
LEDs /FEET	CUTTING UNIT (IN)
146	1.97
VOLTAGE	INGRESS PROTECTION
24V	IP20
FPC WIDTH (IN)	LUMINOUS FLUX
0.2	152 LM/FT
ROLL SIZE (FEET)	CERTIFICATES
16.4	cULus

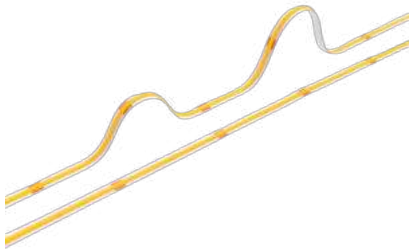

COB STRIP

COLOR TEMPERATURE	POWER W/F
4000K	2.13
LEDs /FEET	CUTTING UNIT (IN)
146	1.97
VOLTAGE	INGRESS PROTECTION
24V	IP20
FPC WIDTH (IN)	LUMINOUS FLUX
0.2	152 LM/FT
ROLL SIZE (FEET)	CERTIFICATES
16.4	cULus

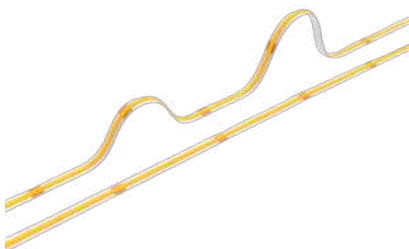

COB STRIP

COLOR TEMPERATURE	POWER W/F
5000K	2.13
LEDs /FEET	CUTTING UNIT (IN)
146	2.19
VOLTAGE	INGRESS PROTECTION
24V	IP20
FPC WIDTH (IN)	LUMINOUS FLUX
0.2	152 LM/FT
ROLL SIZE (FEET)	CERTIFICATES
16.4	cULus



SMD 2835 STRIP

COLOR TEMPERATURE	POWER W/F
2700K	6.59
LEDs /FEET	CUTTING UNIT (IN)
49	1.97
VOLTAGE	INGRESS PROTECTION
24V	IP20
FPC WIDTH (IN)	LUMINOUS FLUX
0.39	1037 LM/FT
ROLL SIZE (FEET)	PIXEL PITCH (IN)
16.4	0.24
CERTIFICATES	
cULus	



SMD 2835 STRIP

COLOR TEMPERATURE	POWER W/F
3000K	6.59
LEDs /FEET	CUTTING UNIT (IN)
49	1.97
VOLTAGE	INGRESS PROTECTION
24V	IP20
FPC WIDTH (IN)	LUMINOUS FLUX
0.39	1037 LM/FT
ROLL SIZE (FEET)	PIXEL PITCH (IN)
16.4	0.24
CERTIFICATES	
cULus	



SMD 2835 STRIP

COLOR TEMPERATURE	POWER W/F
4000K	6.59
LEDs /FEET	CUTTING UNIT (IN)
49	1.97
VOLTAGE	INGRESS PROTECTION
24V	IP20
FPC WIDTH (IN)	LUMINOUS FLUX
0.39	1037 LM/FT
ROLL SIZE (FEET)	PIXEL PITCH (IN)
16.4	0.24
CERTIFICATES	
cULus	



SMD 2835 STRIP

COLOR TEMPERATURE	POWER W/F
5000K	6.59
LEDs /FEET	CUTTING UNIT (IN)
49	1.97
VOLTAGE	INGRESS PROTECTION
24V	IP20
FPC WIDTH (IN)	LUMINOUS FLUX
0.2	1037 LM/FT
ROLL SIZE (FEET)	PIXEL PITCH (IN)
16.4	0.24
CERTIFICATES	
cULus	



SMD 5050 STRIP

COLOR TEMPERATURE	POWER W/F
RGBWW	6
LEDs /FEET	CUTTING UNIT (IN)
29	1.97
VOLTAGE	INGRESS PROTECTION
24V	IP20
FPC WIDTH (IN)	LUMINOUS FLUX
0.2	1037 LM/FT
ROLL SIZE (FEET)	PIXEL PITCH (IN)
16.4	0.33
CERTIFICATES	
cULus	



SMD 2835 STRIP

COLOR TEMPERATURE	POWER W/F
2200-6000K	2.93+2.93
LEDs /FEET	CUTTING UNIT (IN)
37	3.94
VOLTAGE	INGRESS PROTECTION
24V	IP20
FPC WIDTH (IN)	LUMINOUS FLUX
0.47	275+275 LM/FT
ROLL SIZE (FEET)	PIXEL PITCH (IN)
16.4	0.8+0.8
CERTIFICATES	
cULus	



MN20-B5C-2P-T-CV
T/L Shape

CABLE LENGTH

NO WIRE

TYPE

SMD / COB

PCB WIDTH (IN)

0.19

LED STRIP COLOR

MONO

SOLDER PAD QTY

2 PINS

IP RATED

IP20

VOLTAGE

DC 3-24V

MATERIAL

PVC, PC, CU

CERTIFICATES

cULus, ROHS, CE

MN20-B5C-2P-CV
Strip to Strip Joint

CABLE LENGTH

NO WIRE

TYPE

SMD / COB

PCB WIDTH (IN)

0.19

LED STRIP COLOR

MONO

SOLDER PAD QTY

2 PINS

IP RATED

IP20

VOLTAGE

DC 3-24V

MATERIAL

PVC, PC, CU

CERTIFICATES

cULus, ROHS, CE



MN20-XB5C-2P/L10CM
Strip To Power

CABLE LENGTH	TYPE
3.93	SMD / COB
PCB WIDTH (IN)	LED STRIP COLOR
0.19	MONO
SOLDER PAD QTY	IP RATED
2 PINS	IP20
VOLTAGE	MATERIAL
DC 3-24V	PVC, PC, CU
CABLE DATA	CERTIFICATES
22AWG	cULus, ROHS, CE



MN20-2XB5C-2P/L10CM
Strip To Strip Bridge

CABLE LENGTH	TYPE
3.93	SMD / COB
PCB WIDTH (IN)	LED STRIP COLOR
0.19	MONO
SOLDER PAD QTY	IP RATED
2 PINS	IP20
VOLTAGE	MATERIAL
DC 3-24V	PVC, PC, CU
CABLE DATA	CERTIFICATES
22AWG	cULus, ROHS, CE



MN20-B8C-2P-T-CV
T/L Shape

CABLE LENGTH

NO WIRE

TYPE

SMD / COB

PCB WIDTH (IN)

0.31

LED STRIP COLOR

MONO

SOLDER PAD QTY

2 PINS

IP RATED

IP20

VOLTAGE

DC 3-24V

MATERIAL

PVC, PC, CU

CERTIFICATES

cULus, ROHS, CE



MN20-B8C-2P-CV
Strip To Strip Joint

CABLE LENGTH

NO WIRE

TYPE

SMD / COB

PCB WIDTH (IN)

0.31

LED STRIP COLOR

MONO

SOLDER PAD QTY

2 PINS

IP RATED

IP20

VOLTAGE

DC 3-24V

MATERIAL

PVC, PC, CU

CERTIFICATES

cULus, ROHS, CE



MN20-XB8C-2P/L10CM
Strip To Power

CABLE LENGTH	TYPE
3.93	SMD / COB
PCB WIDTH (IN)	LED STRIP COLOR
0.31	MONO
SOLDER PAD QTY	IP RATED
2 PINS	IP20
VOLTAGE	MATERIAL
DC 3-24V	PVC, PC, CU
CABLE DATA	CERTIFICATES
22AWG	cULus, ROHS, CE



MN20-2XB8C-2P/L10CM
Strip To Strip Bridge

CABLE LENGTH	TYPE
3.93	SMD / COB
PCB WIDTH (IN)	LED STRIP COLOR
0.31	MONO
SOLDER PAD QTY	IP RATED
2 PINS	IP20
VOLTAGE	MATERIAL
DC 3-24V	PVC, PC, CU
CABLE DATA	CERTIFICATES
22AWG	cULus, ROHS, CE

**MN20-B10C-2P-T-CV**

T/L Shape

CABLE LENGTH

NO WIRE

TYPE

SMD / COB

PCB WIDTH (IN)

0.39

LED STRIP COLOR

MONO

SOLDER PAD QTY

2 PINS

IP RATED

IP20

VOLTAGE

DC 3-24V

MATERIAL

PVC, PC, CU

CERTIFICATES

cULus, ROHS, CE**MN20-B10C-2P-CV**

Strip To Strip Joint

CABLE LENGTH

NO WIRE

TYPE

SMD / COB

PCB WIDTH (IN)

0.39

LED STRIP COLOR

MONO

SOLDER PAD QTY

2 PINS

IP RATED

IP20

VOLTAGE

DC 3-24V

MATERIAL

PVC, PC, CU

CERTIFICATES

cULus, ROHS, CE



MN20-XB10C-2P/L10CM
Strip To Power

CABLE LENGTH	TYPE
3.93	SMD / COB
PCB WIDTH (IN)	LED STRIP COLOR
0.39	MONO
SOLDER PAD QTY	IP RATED
2 PINS	IP20
VOLTAGE	MATERIAL
DC 3-24V	PVC, PC, CU
CABLE DATA	CERTIFICATES
22AWG	cULus, ROHS, CE



MN20-2XB10C-2P/L10CM
Strip To Strip Bridge

CABLE LENGTH	TYPE
3.93	SMD / COB
PCB WIDTH (IN)	LED STRIP COLOR
0.39	MONO
SOLDER PAD QTY	IP RATED
2 PINS	IP20
VOLTAGE	MATERIAL
DC 3-24V	PVC, PC, CU
CABLE DATA	CERTIFICATES
22AWG	cULus, ROHS, CE

**MN20-B10C-6P-CV**

Strip To Joint

CABLE LENGTH

NO WIRE

TYPE

SMD / COB

PCB WIDTH (IN)

0.39

LED STRIP COLOR

RGB+CCT

SOLDER PAD QTY

6 PINS

IP RATED

IP20

VOLTAGE

DC 3-24V

MATERIAL

PVC, PC, CU

CERTIFICATES

cULus, ROHS, CE**MN20-XB10-6P/L10CM**

Strip To Power

CABLE LENGTH

3.93

TYPE

SMD

PCB WIDTH (IN)

0.39

LED STRIP COLOR

RGB+CCT

SOLDER PAD QTY

6 PINS

IP RATED

IP20

VOLTAGE

DC 3-24V

MATERIAL

PVC, PC, CU

CABLE DATA

22AWG

CERTIFICATES

cULus, ROHS, CE



MN20-2XB10-6P/L10CM
Strip To Strip Bridge

CABLE LENGTH	TYPE
3.93	SMD
PCB WIDTH (IN)	LED STRIP COLOR
0.39	RGB+CCT
SOLDER PAD QTY	IP RATED
6 PINS	IP20
VOLTAGE	MATERIAL
DC 3-24V	PVC, PC, CU
CABLE DATA	CERTIFICATES
22AWG	cULus, ROHS, CE



MN20-B12C-3P-CV
Strip To Strip Joint

CABLE LENGTH	TYPE
NO WIRE	SMD
PCB WIDTH (IN)	LED STRIP COLOR
0.47	CCT
SOLDER PAD QTY	IP RATED
3 PINS	IP20
VOLTAGE	MATERIAL
DC 3-24V	PVC, PC, CU
CERTIFICATES	
cULus, ROHS, CE	

**MN20-XB12C-3P/L10CM**

Strip To Power

CABLE LENGTH

3.93

TYPE

SMD

PCB WIDTH (IN)

0.47

LED STRIP COLOR

CCT

SOLDER PAD QTY

3 PINS

IP RATED

IP20

VOLTAGE

DC 3-24V

MATERIAL

PVC, PC, CU

CABLE DATA

22AWG

CERTIFICATES

cULus, ROHS, CE**MN20-2XB12C-3P/L10CM**

Strip To Strip Bridge

CABLE LENGTH

3.93

TYPE

SMD

PCB WIDTH (IN)

0.47

LED STRIP COLOR

MONO

SOLDER PAD QTY

3 PINS

IP RATED

IP20

VOLTAGE

DC 3-24V

MATERIAL

PVC, PC, CU

CABLE DATA

22AWG

CERTIFICATES

cULus, ROHS, CE



www.ledmode.com

Phone: +1 (909) 909-0110

Email: info@ledmode.com

7401 Lankershim Blvd, Unit 101,
North Hollywood, CA 91605

©UNI UNIVERSAL ELECTRICS INC